



# 150w Solar Blanket Folding Solar Blanket

### **Basic Information**

Place of Origin: ChinaBrand Name: LinksunCertification: CE

Model Number: LS-NB150M
 Minimum Order Quantity: 100PCS
 Packaging Details: 1pcs/carton
 Delivery Time: 5-8days

• Payment Terms: 30% TT in advance, 70% balance before

delivery.

• Supply Ability: 1000pieces per week



## **Product Specification**

Product Name: Solar Folding Bag

• Color: Blue


Solar Cell: Monocrystalline CellApplication: Fishing, Camping, Picnics

Warranty: 5 Years Protection Class: IP65

Product Dimension(Folded):540\*570\*25mm
Product Dimension(Open): 1660\*540\*5mm

• Highlight: 150w solar charging bag,

Blue solar charging bag, solar bank backpack 150 watt



## More Images



# 150w Solar Blanket Folding Solar Blanket

The 150W Portable Solar Cloth Bag with Bracket is ideal for camping and fishing. Featuring high-efficiency monocrystalline solar cells, it ensures maximum power output. The lightweight, foldable design with an integrated bracket allows for easy setup and optimal sunlight exposure. Perfect for charging 12V batteries, phones, and portable power stations, it offers reliable power on the go. Durable and weather-resistant, this solar cloth bag is your essential companion for outdoor adventures.

#### **Product Features:**

#### 1)Folding, outdoor portable more convenient.

It can be used for fishing, camping, picnics, and hiking, including on yachts and RVs.

#### 2) Good waterproof performance

Made of high-quality silicon materials, these coatings have excellent waterproof, anti-corrosion, sun protection and other properties, making solar cloth bags suitable for long-term use in harsh outdoor environments and less susceptible to damage caused by rainwater.


#### 3) Fast charging

Professional design for mobile energy storage, high current charging faster.

#### **Product Details:**

Model	LS-NB150M
Maximum Power(Pmax)	150W (3x50W)
Maximum Power Voltage(Vmp)	18.4V
Maximum Power Current(Imp)	8.16A
Open Circuit Voltage(Voc)	22.8V
Short Circuit Current(Isc)	8.72A
Power Tolerance(Positive)	± 3%
Cell Type	Monocrystalline cell
Contract Dimensions(mm)	Product Dimension(Folded):540*570*25mm Product Dimension(Open):1660*540*5mm
Weight(KGS)	6.5kg
Protection Class	IP65
Maximum System Voltage	60V
Temperature Range	-20°C - 85°C
Standard Test Conditions	1000W/m2, AM1.5, 25°C



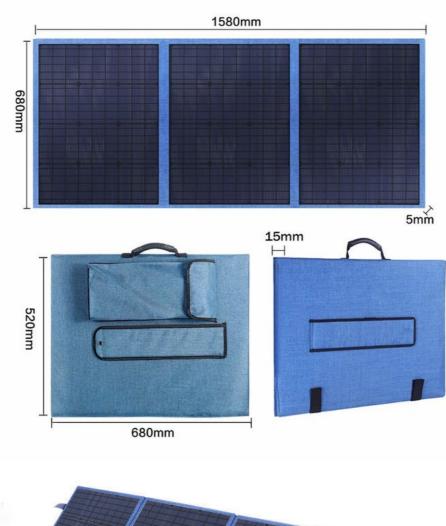



#### EAO.

Q1:What's the solar panels warranty?

A: 5 year's warranty. If you have any questions about our quality during use, you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders.Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order? A:Yes,of course.The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao, Ningbo. Welcome your visit if you like.

Q5:Where are your goods exported?

A:We can export to all over the world.



# Ningbo Linksun Energy Science & Technology Co., LTD

+8615888168085

sales02@zjlinksun.com



e monosolarpanel.com

2nd ,Floor,No.1 Building,Wanyang Entrepreneurial City,Yuyao,Zhejiang Province, China